

FLO-MASTER

Built-In Vacuum Systems



Adapting to any Application

*F*lo-Master delivers up to five times more power than conventional portable vacuums and at an incredible price. Vacuum effectively and with ease as all the germ-laden air is exhausted completely outside your living area. Install in new construction and existing homes.

Engineered for Everyone

Designed for the best combination of quality, power, and price on the market. From RVs to mansions, Flo-Master suits any use.

Built to Last

Made in the USA with all steel, powder-coated, and with the finest electrical components to exceed your expectations.

Filtered to Flow


Air flow remains strong and motors clean year after year as a result of fine filtration.

Features:

- 3 to 6-Year Inclusive Warranty
Lifetime on Manufacturing
- Capacity of 1 to 8-Gallons
- 3-Stage Microfiltration
- Ventable Exhaust
- Dual Debris Intake
- All 18 & 20-Gauge Steel
- Powdercoated In & Out
- Sturdy Two-Stud Bracket
Easy to Hang & Remove
- Outstanding Customer Service
- Variety of Models Available

Proudly Built in the USA
www.builtinvacuum.com



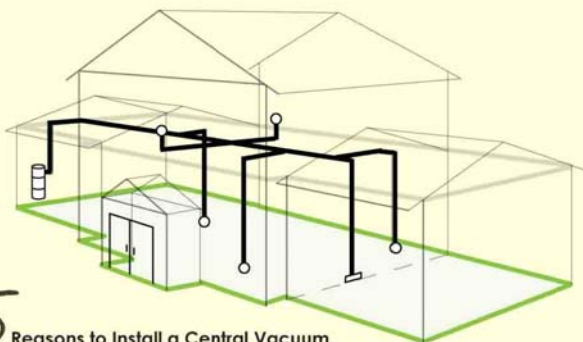

- 5 Reasons to Install a Central Vacuum**
- Less Noise & No Smell
 - Ultimate Vacuuming Convenience
 - 1-Day Installation
 - Costs Less than High-end Uprights
 - No Retrofit Wall Damage

Flo-Master Warranty

M.D. Manufacturing, Inc. warrants its Flo-Master power units against electrical component failure for a period of six (6) years. Any parts (excluding filters) required within the first six years will be furnished free of charge by the Authorized Dealer from whom the power unit was originally purchased. However, with respect to the M60 and M80, the warranty is three (3) years.

Additionally, all Flo-Master units are guaranteed for life against defects in materials and workmanship. In the event an Authorized Dealer is not nearby, Flo-Master will honor and perform warranty services provided the power unit is returned to the factory, freight pre-paid. This warranty does not apply to commercial applications, misuse, abuse, acts of God, or if the unit has been worked on by an unauthorized person.

Exterior Venting

Venting not required but optional. When venting M92, vent both exhaust ports. For the M60, exterior venting is required for confined or sealed locations.

M60 Note

The M60 is designed to fit comfortably in tight spaces such as cabinets, closets, and under stairs. It is perfect for stand alone applications such as an RV, VacPan, and Stretch Hose. M60's lock-down lid allows for versatile horizontal mounting.

M60, M85 Requirement

The included air relief valve must be installed on an intake or in the pipe system.

*Factors other than Airwatts should be taken into consideration including: altitude, amount of hours of daily usage, complexity of pipe installation, length of furthest vacuum inlet, noise level desired, type and size of filtration, country of origin, construction materials, and budget. The square footage recommendations on this page are solely based upon the suction capabilities of the unit.

Made in the USA
All Steel Construction



Flo-Master Models MD Part #	M60 120v 117FM	M80 120v 113F	M85 120v 116FM	M92 240v 108FXM
Motor	Single	Single 5.7", 2-stg.	Single 5.7", 2-stg.	Dual by-pass 5.7", 3-stg.
Max Airwatts	453	508	650	943
Max Amps	10.2	11.6	14.9	13.7
WaterLift	108"	120.4"	143"	137"
CFM @ 2" opening	119.5	106	130	191
Voltage	120	120	120	240
Height	13.5"	20"	33"	30"
Weight	12.5 lbs.	17 lbs.	34 lbs.	53 lbs.
Trash Capacity	1 gal.	5 gal.	8 gal.	
Filtration Type	Closed Bag		Open or Closed Bag	
Max Ft²	Small Application	3000*	8,000*	20,000*
Warranty	Three Years +Lifetime		Six Years +Lifetime	
Protection	Resettable Minibreaker			
Construction	18 & 20 Gauge Steel			
Finish	Powder-coat			



The Stealth Attachment Kit is an excellent compliment to all Flo-Master Central Vacuums.

MD CENTRAL VACUUMS *for all seasons your central vacuum*